

Specifications


MODEL		GS™-3384 RT	
MEASUREMENTS		US	Metric
Working height max*		39 ft	12.06 m
A	Platform height	33 ft	10.06 m
B	Platform length - outside, extended		
	single deck	17 ft 6.25 in	5.34 m
	dual deck	21 ft 6.5 in	6.57 m
C	Platform width - outside	6 ft	1.83 m
Platform height - stowed**		5 ft 1 in	1.55 m
D	Height - stowed: folding guardrails	8 ft 9.5 in	2.68 m
	rails lowered	6 ft 6.75 in	2.0 m
E	Length - stowed: single deck	12 ft 11.25 in	3.94 m
	dual deck	13 ft 5 in	3.98 m
	with outriggers	16 ft	4.88 m
F	Width: standard tires	7 ft	2.13 m
	high flotation tires	7 ft 11 in	2.41 m
G	Wheelbase	9 ft 4 in	2.84 m
H	Ground clearance - center	13 in	.33 m

PRODUCTIVITY		
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability***	50%	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Tires - high flotation air-filled	16 x 33 in	41 x 84 cm
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

POWER		
Power source	Ford gas/LPG 82 hp (61.1 kW) Deutz diesel F3L 1011 49 hp (36 kW), air cooled	
Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

WEIGHT****		
	12,005 lbs	5,445 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

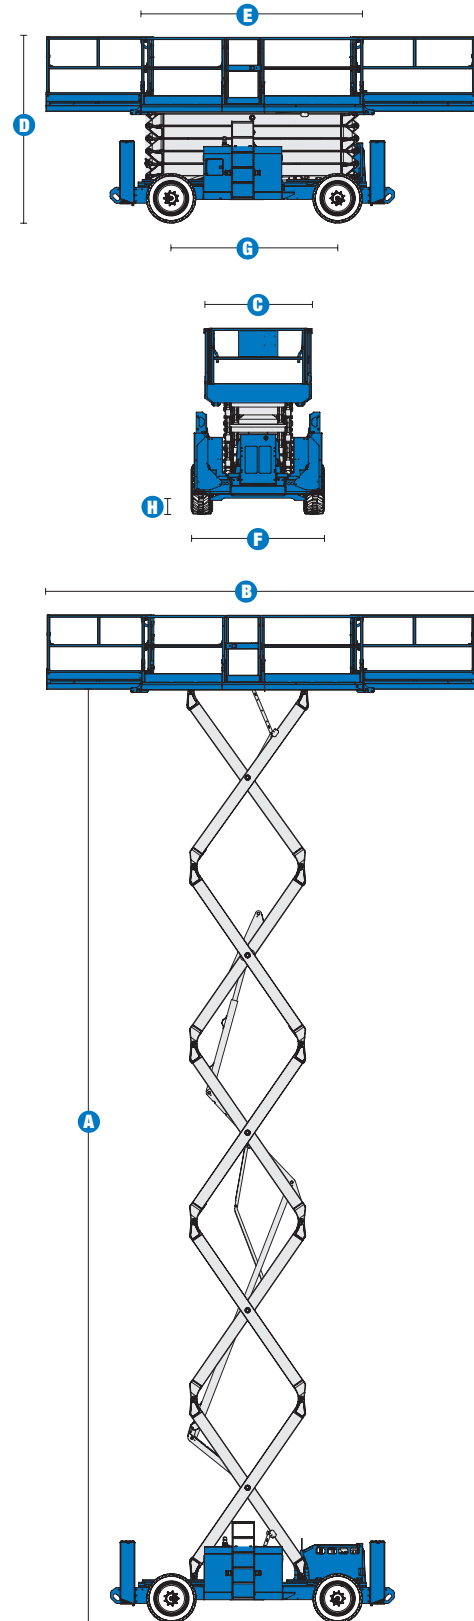

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tires. Deduct 2 in (5.8 cm) for turf and non-marking.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Dual slide-out extension deck package
5 ft (1.52 m) front and 4 ft (1.22 m) rear

POWER OPTIONS

- Ford gas/LPG 86 hp (61.1 kW)
- Deutz diesel 49 hp (36 kW)

DRIVE

- 4WD

TIRE OPTIONS

- Foam-filled rough terrain tires (standard)
- High flotation air-filled tires
- Non-marking tires

STANDARD FEATURES

MEASUREMENTS

- 39 ft (12.06 m) working height
- Up to 2,500 lb (1,134 kg) lift capacity

PRODUCTIVITY

- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Folding guardrails
- Two self-closing gates
- Full height swing gate
- Electric horn
- Tilt sensor with audible alarm
- Descent alarm
- Hour meter
- Full-time positive traction control
- 4WD
- Slide-out engine tray
- AC power to platform
- Foam-filled rough terrain tires

POWER

- Meets current emissions standards



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual slide-out extension deck package
5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Platform work lights
- Pipe cradle (pair)
- Dual flashing beacons
- Motion alarm

POWER

- 2000 watt generator (110 V / 60 Hz)
- Cold start packages for all engines
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- Hydraulic oil cooler
- LPG steel tank only, 33.5 lb capacity
- LPG tank kit (carrier with tank)

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2005 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company.